


Sondestyrt pumpek kontroll versjon 1

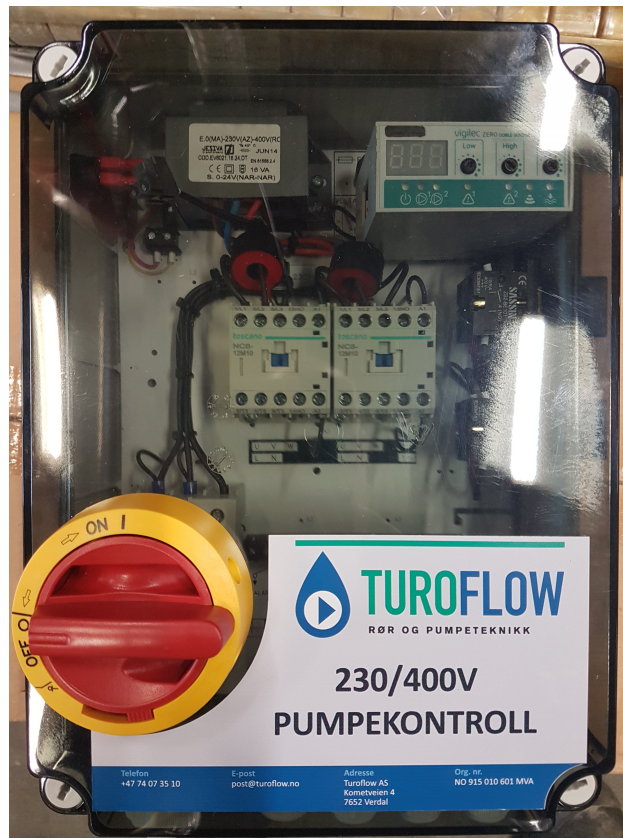

Overload, phase loss, overheat

Float switches / 4/20mA Sensor (**)

230 and 400Vac (110 and 220 Vac)

2 Pumps up to 12A, DOL

Digital display

Alarm contact + Buzzer

Anti-jamming system

Smart alternating (***)

Optional modules: Alarm battery,
Conductive probes, PTC probes, NC
alarm float and Phase sequence relay,

